


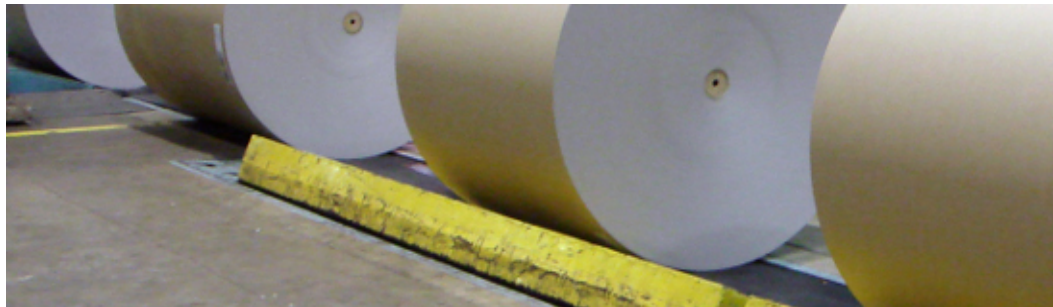

## Technical Data Sheet

### PREPRINT S 80GR

| Parameters       | Standard   | Unit             | Measurement |
|------------------|------------|------------------|-------------|
| Substance        | ISO 536    | g/m <sup>2</sup> | 80 +/- 2    |
| Thickness        | ISO 534    | µm               | 113+/- 3    |
| Bulk             | ISO 534    |                  | 1,41        |
| Moisture Content | ISO 287    | %                | 4,4 +/- 0,6 |
| Roughness        | ISO 8791   | Bendtsen ml/min  | 230 +/- 50  |
| Whiteness        | ISO 11475  | CIE              | 170 +/- 2   |
| Brightness D65   | ISO 2470-2 | %                | 113 +/- 1   |
| Opacity          | ISO 2471   | %                | 92 +/- 2    |
| Stiffness MD     | ISO 2493   | mN               | 150 +/- 15  |
| Stiffness CD     | ISO 2493   | mN               | 50 +/- 15   |

#### Production sites:

The production mills operate in compliance with the following standards



#### Special Attributes:



#### References:

Product is made taking into account requirements of DIN EN 12281  
Product made from ECF Pulp  
ISO 45001 - Health & Safety

The data presented can be changed without notice.

International Paper EMEA  
Chaussée de la Hulpe 166  
1170 Brussels, Belgium  
Tel.: +32 2 774 1211  
Fax: +32 2 774 1299  
Extract date: 21.12.2020